




## Fixing Instructions

### Cube Horizontal Radiator



Please unpack your delivery carefully and inspect the radiator and contents – any damages or shortages must be notified to your supplier **within 3 days of delivery** of your goods.

# Specifications

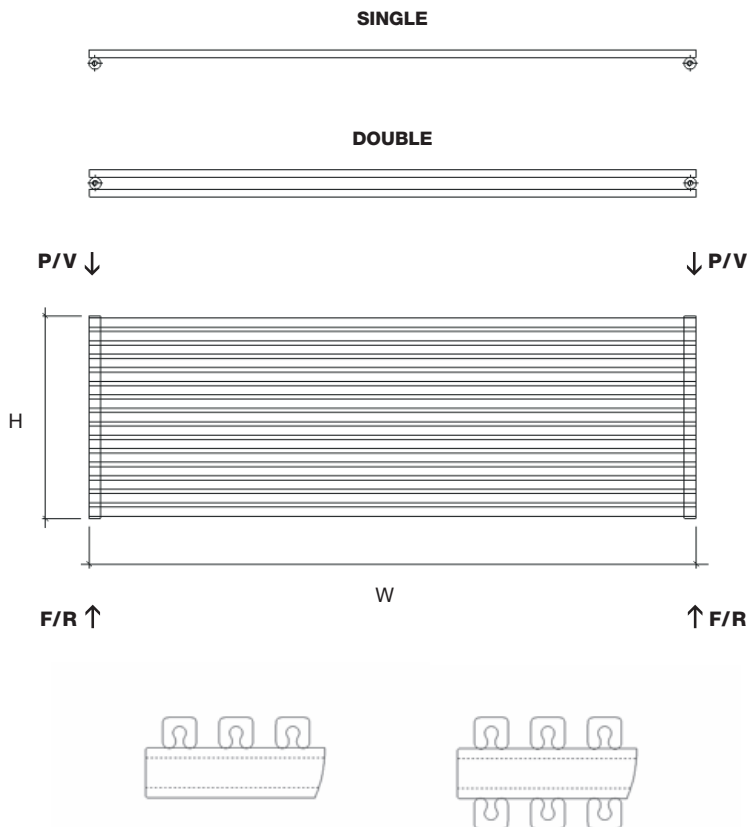

## Technical Information

**Standard connections:** ½"

**F** = Flow    **R** = Return

**P** = Plug    **V** = Vent

### Pipe centres:

Horizontal = radiator width - 36mm

### Single Horizontal

**Wall to front face** = 112-117mm

**Wall to pipe centre** = 70-75mm

### Double Horizontal

**Wall to front face** = 100mm

**Wall to pipe centre** = 60mm

## Technical Specifications

**Materials:** Steel

**Connections:** ½" Flow and Return

**Test pressure:** 8 Bar

**Testing authority:** EN442

**Max operation pressure:** 6 Bar

**Max working temperature:** 90c

These can be cleaned using a soft damp cloth with a non-abrasive cleaning product.



**PLEASE NOTE:** That in accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we recommend flushing the heating system before installation of new radiators and then adding the correct quantity and type of inhibitor for use with the radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by the manufacturer warranty. It is the responsibility of the installer to ensure the correct use and suitability of the fixings provided. No liability for costs or damages arising from failure to do so can be accepted.

# Content list

---



Review instructions carefully before installation.  
Installation should be completed by a suitably qualified person.  
Please dispose of packaging in a responsible manner.

---

Inside your accessories box you will have:

4 Wall Brackets

# Installation Instructions

---



## Single Radiator

There are 4 clamps which can be positioned as needed up and down the collectors – ideally 2 tubes in from the top and bottom. To install, lightly fix the clamp heads to the sleeve then secure the head in position in collector. Hold the radiator in place, ensure it is level and mark the location of the 4 bracket sleeves. Remove the sleeve from the clamp head. Using the marked position on the wall take a sleeve and mark the location of the central hole.

**To fix the brackets:** using drill and plugs fix the sleeve to the wall, firmly secure the clamp heads.

**Hang the radiator** with the bracket sleeves fixed and level and the clamp heads firmly fixed to the collector, hang the radiator. Secure the clamp heads to the sleeves



## Double Radiator

The fixing positions for the 2 top brackets are 82mm down and spaced left to right as needed along the cross tubes within the collectors. To accurately mark the bottom fixing position it is suggested that you mark, fix and level the top 2 brackets first: then hang the radiator, ensure it is vertically level then manually hold the bottom brackets in place whilst marking accurately.

**To fix the brackets:** using drill and plugs fix the brackets and level with a spirit level.

**Hang the radiator** with the 4 wall brackets fixed and levelled, the radiator is just lowered ensuring the welded on hooks securely locate in all the 4 brackets.



**PLEASE NOTE THAT IT IS ESSENTIAL THAT ALL BRACKETS ARE LEVEL TO ENSURE A VERTICAL ALIGNMENT FOR CONNECTING PIPEWORK.**

# Terms and Conditions

---

You must immediately remove all packaging, inspect the goods and notify us of any damage to the goods within 3 days of delivery. We shall have no obligation to replace or repair damaged goods in the event of failure by the Buyer to comply with this provision. Radiators which are off an unacceptable standard or are damaged must not be installed. If any items is installed it will be treated as being as accepted as received.

Damaged goods being returned will only be collected from your delivery address, unless otherwise agreed in writing. Any other goods, which we accept back, are to be returned by you to our place of business at your expense.

Items will be accepted as a return which have not been installed or damaged after delivery. We do not accept liability for any damages sustained after delivery. Goods should be returned in their original packaging, provided such packaging and goods are undamaged.

We may issue a credit note for goods which we accept as returned.

We may agree to provide you with replacement goods prior to collecting or receiving back the goods to be returned (whether faulty, damaged or otherwise) but only on the condition that: the replacement goods are paid for in full and we reserve the right to re-invoice you in the event that the returned goods are found to be in a worse condition than when they were originally received by you or where such goods have not been received back to us within 3 months of the replacement goods being received by yourselves. A re-stocking charge of 30% will be applied to all non-faulty stock items that wish to be returned. Special order and non-stock products cannot be cancelled. Where cancellation or alteration of orders is accepted by us, you may be required to pay a restocking charge, to cover administrative costs and collection costs (if applicable); such charges to be determined by us. If the goods we deliver are faulty or damaged, we will meet the cost of the return, as long as the fault is reported to us within 3 working days.

The goods will be deemed to have been accepted when they have been delivered and we may not accept claims for any visible defects found after installation.

We accept no liability for any cost incurred relating to the cost of installation.

We shall not be liable for any plumber's costs, decorator's costs, transport costs, late penalties, or any other costs, as a direct or indirect result of (i) any defect in the goods (including but not limited to any manufacturing faults, such as leaks, that become apparent on or after installation) or (ii) late delivery of the goods.

**GUARANTEES AND LIABILITIES** – we are not the manufacturer of this product we will take all reasonable endeavours to make over to you the benefit of any warranty or guarantee given by the manufacturers. The item must have been fitted in accordance with British and or European standards as well as these fitting instructions.

