

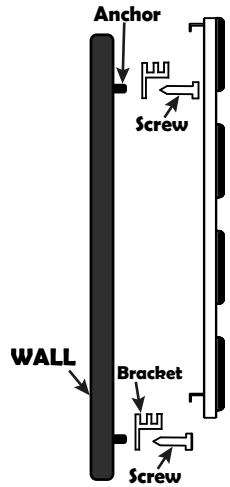
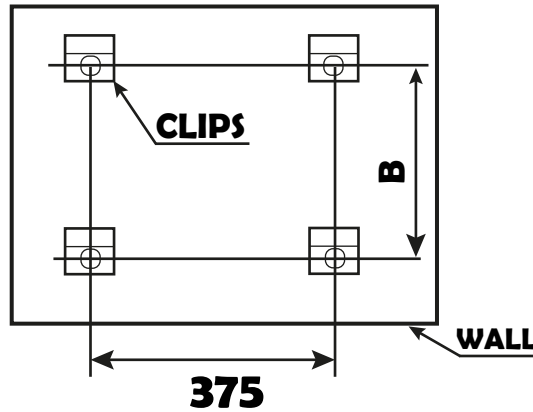



VIVARO INSTALLATION GUIDE

This product must be fitted only by a fully qualified installer.

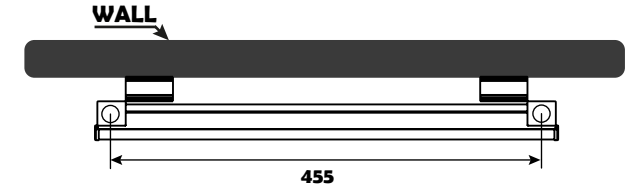

CLIPS X 4PCS	
WALL ANCHORS 4 PCS	
FIXING X SCREW 4 PCS	
CAP X 2 PCS	
END PLUG X 1 PCS	
AIR VENT X 1 PCS	

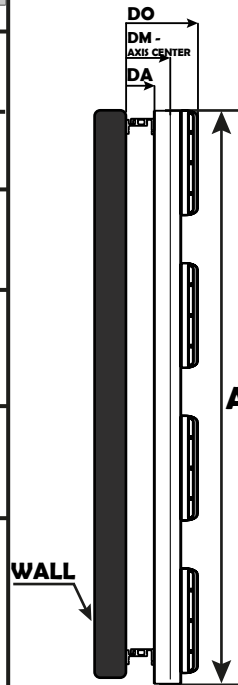

NAMES	WIDHT	A	B	DA	DM	DO
VIVARO	500	1100	1010	25	40	65
VIVARO	500	1400	1310	25	40	65

The product was sent you as the rubber was weared on the product. Make sure and control that the rubber is connected to product after montage process

GENERAL RECOMMENDATION

- Before fitting the radiator it is necessary to wash out the heating system to remove any existing mud, scale, work residues, traces of flux, oil, etc.
- When the system water pH is outside the 8,5 -5,5 range and/or when the dissolved is above 0,1mg/liter, it is always needed to protect the heating system components (the radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water (silicon rubber too).
- In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall material.
- If the system water exceeds °50C, please install a warning mark near the radiator to avoid any accidental scalding.
- Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemical againts during cleaning operations. It is prohibited to climb onthe radiator.
- Maximum working temperature °95C, maximum working pressure 4 bar.